



THERMO  
COMFORT

# The new MULTI PRO

Improved noise reduction









# Line-up of Outdoor Units

Among the MULTI SPLIT models, four models have been newly released.


**New MULTI (PRO)**

Nominal Capacity		kBtu/h	14	16	18	21
		kW	4.1	4.7	5.3	6.2
Appearance (Multi Piping Type)		-				
			MU2R15 U13	MU2R17 U13	MU3R19 U23	MU3R21 U23
Cooling Capacity	Rated	kW	4.10	4.69	5.27	6.15
	Min. - Max.	kW	0.88 - 4.72	0.88 - 5.39	1.06 - 6.33	1.06 - 7.33
Heating Capacity	Rated	kW	4.69	5.10	6.33	7.03
	Min. - Max.	kW	0.97 - 5.39	0.97 - 5.51	1.17 - 7.33	1.17 - 7.80
Efficiency	EER	W/W	4.10	3.84	4.43	4.15
	SEER	Wh/Wh	8.60	8.50	8.60	8.50
	COP	W/W	4.40	4.25	4.80	4.51
	SCOP	Wh/Wh	4.61	4.61	4.65	4.65
Seasonal Energy Label	Cooling	-	A+++	A+++	A+++	A+++
	Heating	-	A++	A++	A++	A++
Sound Pressure Level	Cooling	dB(A)	45	46	47	48
	Heating	dB(A)	48	49	50	51
Sound Power Level	Cooling	dB(A)	60	61	61	62
Electrical Characteristic	Power Supply	V, $\Phi$ , Hz	220 - 230 - 240, 1, 50			
IDU Connection	Max. Number of IDUs	EA	2	2	3	3
	Maximum Capacity of All IDUs	kBtu/h	21	24	30	33
	Maximum Capacity of Each IDU	kBtu/h	12	15	15	18

The new MULTI SPLIT models have lower noise than the previous models through structural improvements.

## Improvement of Compressor Operation

✓ Optimize the compressor's capacity and logic with less variation than the previous model.

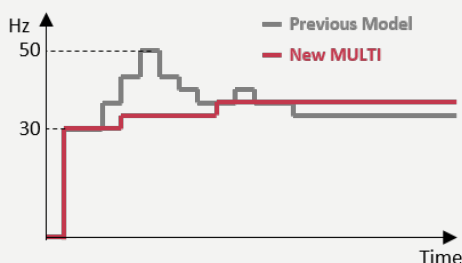

## Improvement of EEV Structure

✓ Redesign the size and pipe structure of each EEV for even distribution of liquid and gas.

